




**HT HI TECH  
POLYMERS OY**

# Adhesive Heat Shrink Tubing

Shrinkage ratio, 3:1, colour black, operating temperature -45 +125 C, UL224, CSA 22.2, RoHs approved material, max voltage 600V.

code	dia max/min mm	length M
SBRS-24	2,4 - 0,80 mm	1,22 m
SBRS-32	3,2 - 1,00	1,22
SBRS-48	4,8 - 1,60	1,22
SBRS-64	6,4 - 2,20	1,22
SBRS-95	9,5 - 3,20	1,22
SBRS-127	12,7 - 4,20	1,22
SBRS-150	15,0 - 5,20	1,22
SBRS-191	19,1 - 6,30	1,22
SBRS-254	25,4 - 8,50	1,22

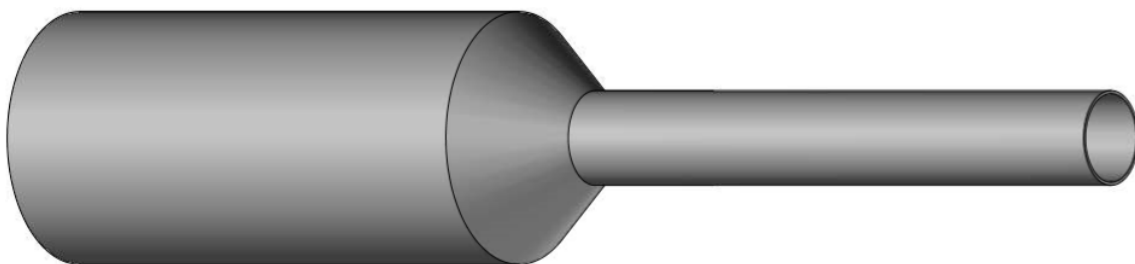

HT HI Tech Polymers Oy  
Hallitie 1  
32740 Sastamala  
Finland

Phone +358 3 8828 600  
email: [firstname.lastname@hitech-polymers.fi](mailto:firstname.lastname@hitech-polymers.fi)

[www.hitech-polymers.fi](http://www.hitech-polymers.fi)

VAT: FI06768280  
FI2256600620095281  
OKOYFIHH